


Configuring TP Link TL-WR702N


If reconfiguring device start at step 1.

If configuring for the first time, plug in device and skip to step 2.


1. Insert a paperclip into the small hole on the device and hold down button until green light starts flashing quickly (about 10 seconds). This resets device to its factory settings.
2. After the device boots up, search for wireless networks on your laptop or smart phone. There may be delay for the network to appear after start up.
3. Connect to TP-Link Network. Use the password written on the device.
4. Open a browser and enter tplinklogin.net or 192.168.0.254 in the address field
5. Enter the word *admin* (lowercase) in both the username and password fields. Click OK.

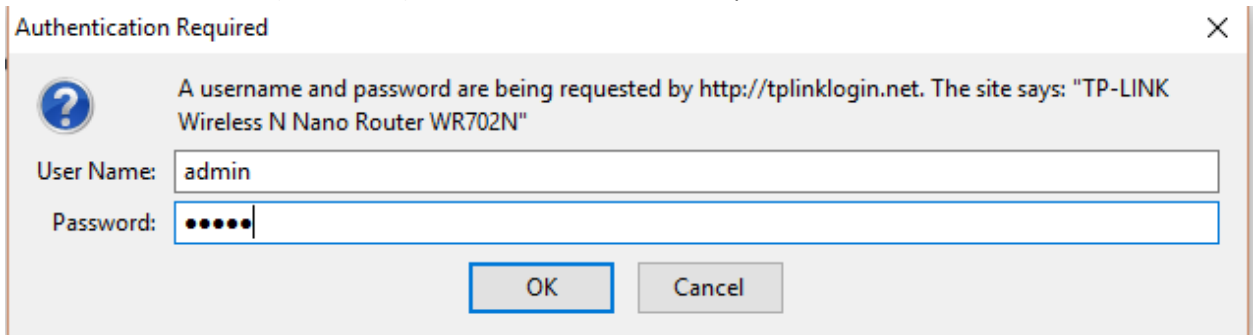


6. Choose "Quick Setup" on left, then click Next, then choose Client Mode and click Next.

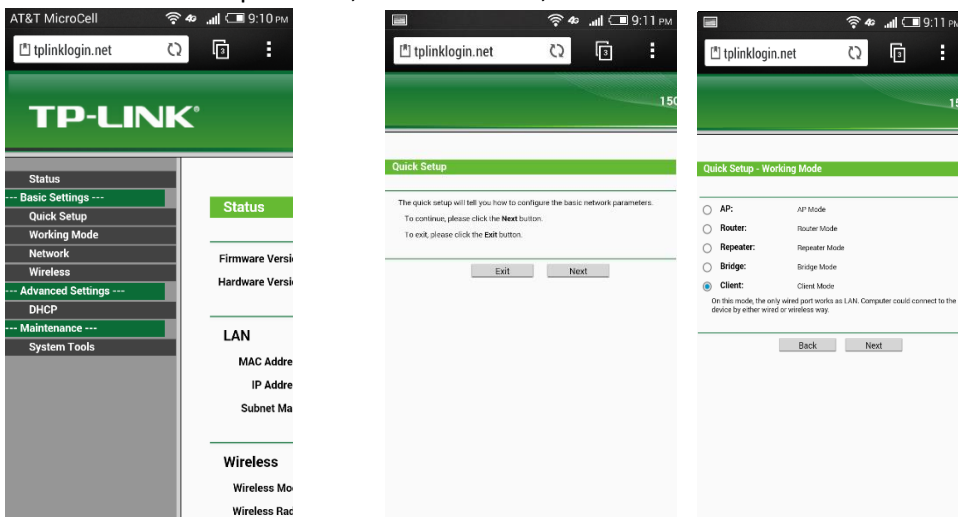

7. Click “Survey” and then choose “Connect” next to the desired wifi network.

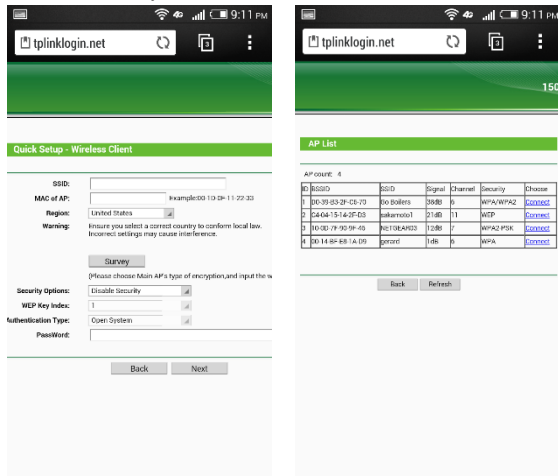

8. The form will prefill with that network’s info. Enter password, click “Next” and then “Reboot”.

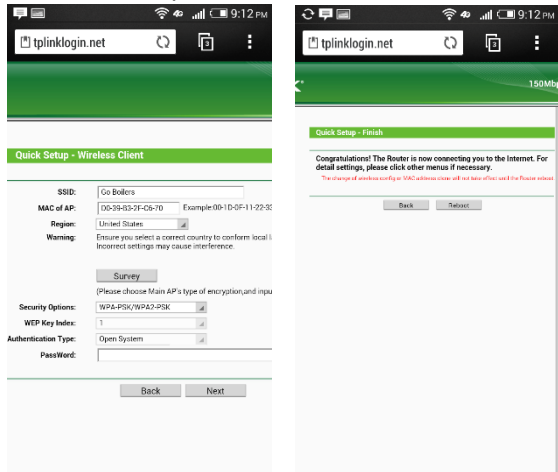

9. After the TP-Link reboots, it will be connected to the new wireless network.